

Glaive I

The Glaive I series is a sleek and stylish powerful POS system that fulfills all business needs. It is specially targeted on any hospitality and special retails businesses that operate under harsh environments and require maximum reliability from the POS equipment. Compact and packed with incredible features, the Glaive I series delivers outstanding performance and enhances business functionality.




- Fanless design without venting hole preventing being clogged
- Robust design is perfect solution on the working table
- Rugged structure and sophisticated outline revealing the taste of profession and style
- 512MB memory expandable to 1GB
- Built-in SATA 2.5" hard disk drive



I/O Connector Panel

Front Panel

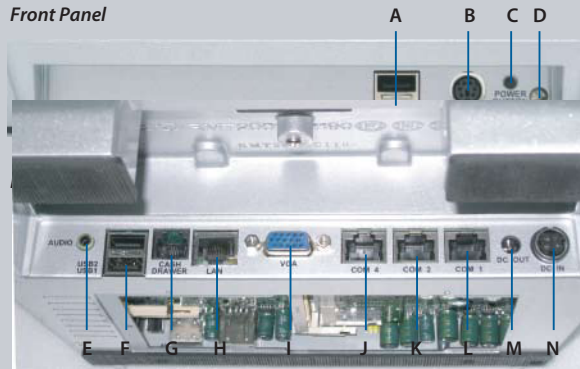

- A. USB
- B. K/B
- C. Power Switch
- D. Power LED
- E. Audio Port
- F. USB
- G. Cash Drawer
- H. LAN
- I. VGA Port
- J. COM4
- K. COM2
- L. COM1
- M. DC 12V Out
- N. DC-in

Specifications

Model	AL-8512	AL-8515
Processor	VIA Eden (V4 Bus) processors 1.6GHz	
System Memory	512MB standard, maximum 1GB (1 x 200-pin DDR2 SDRAM SO-DIMM)	
Power Supply	150W (12V/12.5A) External Power Adaptor	
Storage Device	1 x 3.5" SATA HDD 1 x CF Card (optional)	
Construction	Aluminum Die-casting	
Housing Color	Black / Silver	
Touch LCD Display		
Size / Resolution	12" TFT LCD / 800 x 600	15" TFT LCD / 1024 x 768
Brightness	400 cd/m ²	250 / 350 cd/m ²
Touch Screen	5 / 4 wire Resistive	
I/O Ports		
Serial Port	3 x External : COM1 & COM2, COM4 (RJ45)	
USB Port	4 x External (2 in front, 2 in rear)	
Cash Drawer Port	1 x 12V RJ11 (single/dual)	
PS/2	1 x Keyboard	
LAN Port	1 x RJ45 10/100	
Video Port	1 x VGA	
Audio Port	1 x Line-out, 1 x Mic-in, 1 x Speaker-out	
DC Output	1 x 12V for 2nd display	
OS Supported		
Windows	XP Pro, XP Embedded, WEPOS, POSReady 2009	
Linux	Fedora, SuSE	
Physical Dimensions		
Dimensions (W x H x D)	320 x 320 x 235 mm	365 x 360 x 235 mm
Environment		
EMI / Safety	CE, FCC Class A	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Storage Temperature	-10°C ~ 50°C (14°F ~ 122°F)	
Relative Humidity	10% ~ 90% (non-condensing)	
Optional Peripherals		
Magnetic Stripe Card Reader	MCR single/dual/tripe Track	
2-in1 / 3-in1 Module	MCR+i-Button/MCR+RFID/MCR+Fingerprint/MCR+Smartcard+i-Button	
2nd Display	12" TFT LCD	
Customer Display	VFD/LCD Customer Pole Display	

All product specifications are subject to change without notice.

